


DATA SHEET

VX 4.40

ROTARY VANE VACUUM PUMPS




oil-free
air-cooled

MAKE IT BECKER.

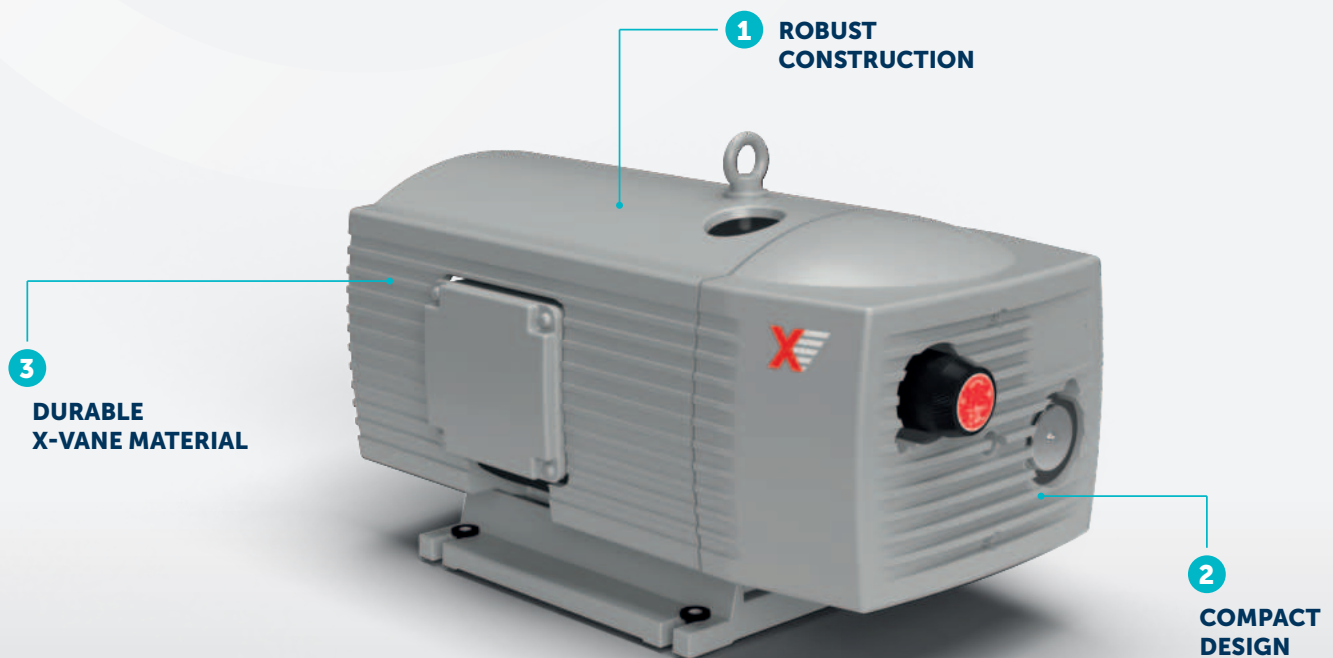

- 1 Thanks to high-quality construction, VX vacuum pumps are both durable and reliable, suitable for demanding conditions.
- 2 The direct use of the motor shaft as a rotor shaft results in a particularly compact design, saving space and resulting in simpler machine integration.
- 3 With a specially developed vane material and functional design, the vanes achieve a service life of up to 20,000 hours or 3 years. Easy on-site maintenance reduces downtime and ensures smooth operation.



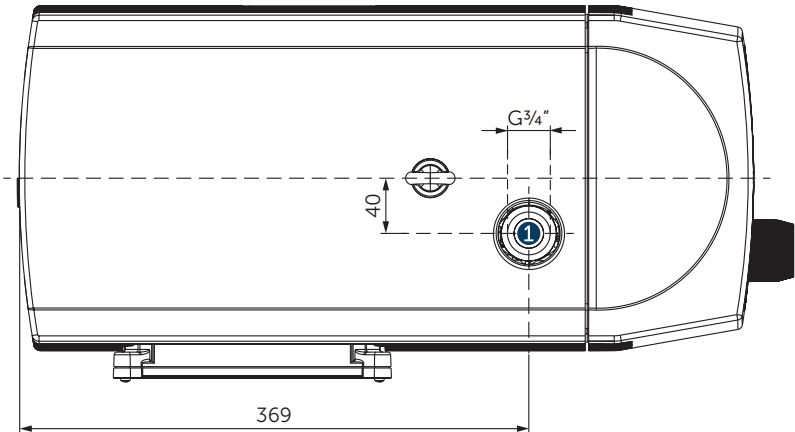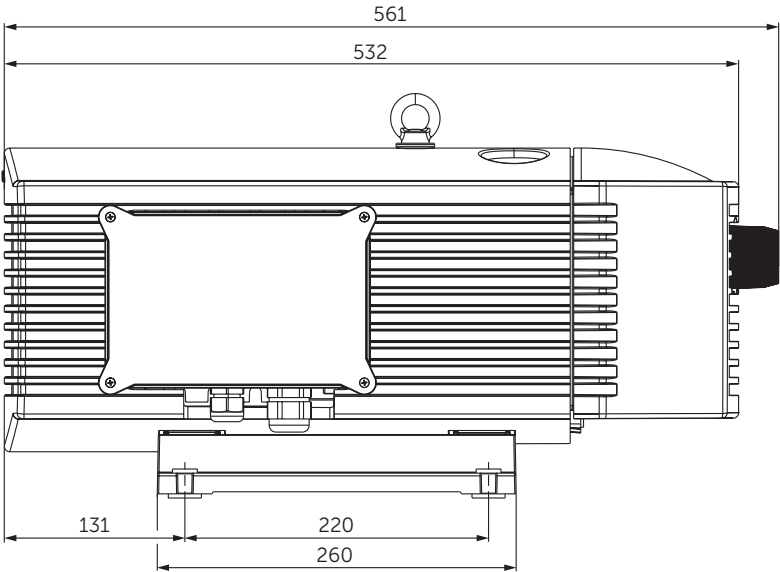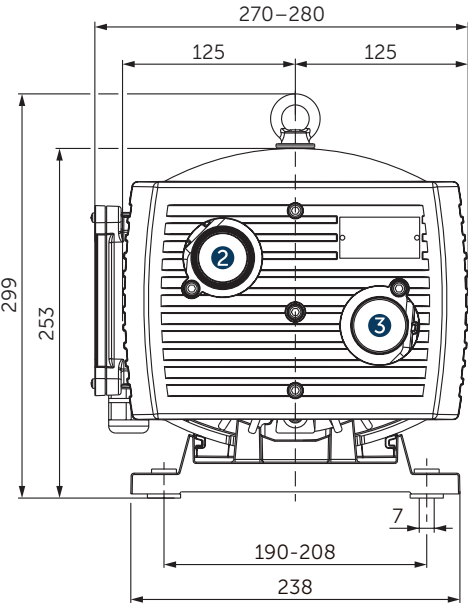


- 1 Vacuum connection (G³/₄"
- 2 Vacuum regulating valve
- 3 Blow-off valve
- Including integrated suction air filter
- The illustration of the terminal box may vary.
- Dimensions in mm

Suction air rate		Vacuum absolute		Installed motor power		Emission sound pressure level ¹⁾		Weight with motor ²⁾
m ³ /h		mbar		kW		dB(A)		kg
50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	
40	48	100	100	1.25-1.3	1.5	67	72	≈38-41

¹⁾ According to DIN EN ISO 3744 (KpA = 3 dB(A)), 1 m distance, at medium load, both connection sides piped

²⁾ Depending on the motor

- Motor data can be found in the separate specification sheet. – Download see back cover. The overall device length is not affected.
- Reference data (atmosphere): 1000 mbar, 20°C; Tolerance: ±5%

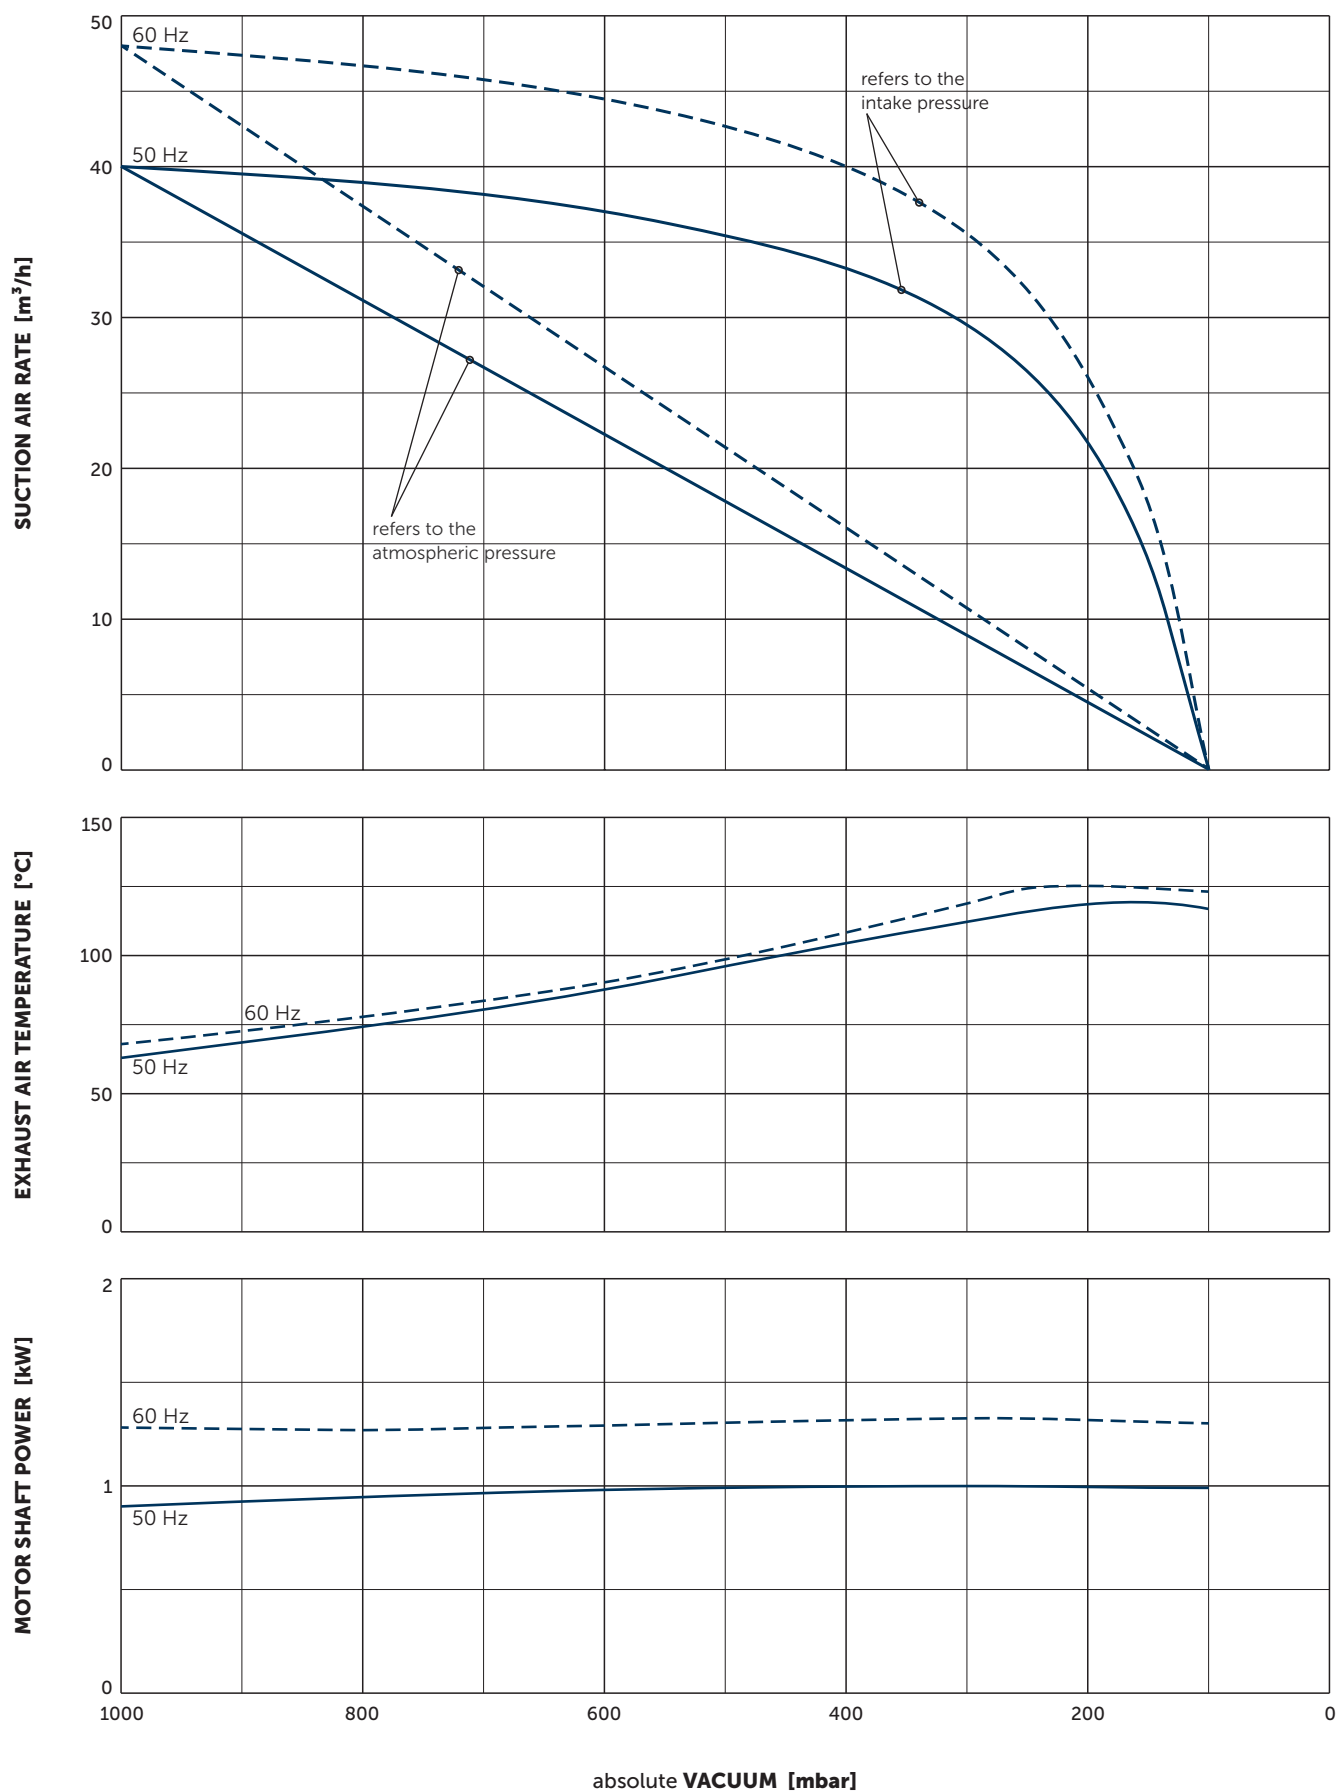

VARIANTS AND ACCESSORIES

- External suction filter ¹⁾
- Sound proof box SH 19 ¹⁾



Example for an external suction filter



Sound proof box SH 19

¹⁾ See separate data sheet

- Possible combinations on request

MAKE IT BECKER.



MOTOR
SPECIFICATIONS

www.becker-international.com
www.becker-international-shop.com

